

HIGH SPEED FABRIC DOOR - HS200




HIGH SPEED FABRIC DOOR

- Manufactured, configured, stocked and assembled in Canada
- Weather and puncture resistant fabric with a layer of woven mono-filament PVC
- Virtually indestructable and easy to repair
- Provides years of trouble free operation and low energy consumption
- Designed for high speed opening and closing



Innovative door products

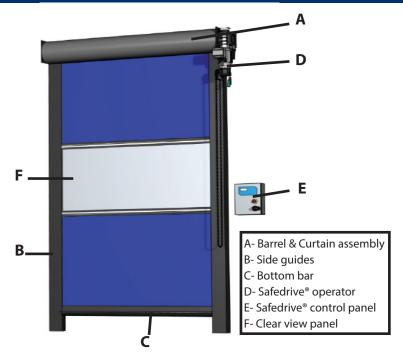

FEATURES

High speeds up to 36"/sec

PVC coated polyester monofiliment fabric available in blue, orange and black

Aluminum bottom bar gives away at impact, allowing for easy repair

Resilient and flexible at temperatures ranging from -15 $^{\circ}$ C to + 90 $^{\circ}$ C

The airtight seal and minimal infiltration is ideal where heat loss or gain is a concern

Clear PVC vision panel 36" height

Springless barrel design

Interior application - No windload

Materials and Construction	
Open/Close Speed	36"-18"/sec
Maximum Size	14' x 14'
Header Clearance	20" above clear opening
Safety Edge	Air wave - Wireless
Steel Guides	Structural steel angle pre-finished black
Hood	Clear anodized aluminum
Bottom Bar	Aluminum - Mill finish
Control Panel	NEMA 4 w/frequency drive
Fabric Weight	Blue & Orange- 45oz, Black - 40oz
Power Supply*	110V, 208V, 230V 1PH or 230V/460V/575V 3PH
Motor HP	As required
Limit Adjustment	Control panel / Encoder
Photocell	Reflective
Warranty *Power supply varies with each model	1 year on materials and workmanship Optional transformer may be required. Call for details.

Power supply varies with each model. Optional transformer may be required. Call for details.



Colour Options







Orange

Blue

Guide & Headplate Finish Upgrades





coated steel

Safedrive® Operator & Digital Control Panel





UL325 Approved

Options

Light Curtain







Loop Detector



Photocell



Pull Cords



and/or Beacon



Warning Horn

Remote Control



Motion Detector

