

SDI Rolling Steel Service Doors




ROLLING STEEL SERVICE DOOR

- Manufactured in Canada
- Available in 2" or 3" curved or flat slats
- Provides years of trouble free operation
- Available in push up, chain hoist, and motor operation
- Bolted barrel design for ease of repair

Rolling Steel Service Door



Slats

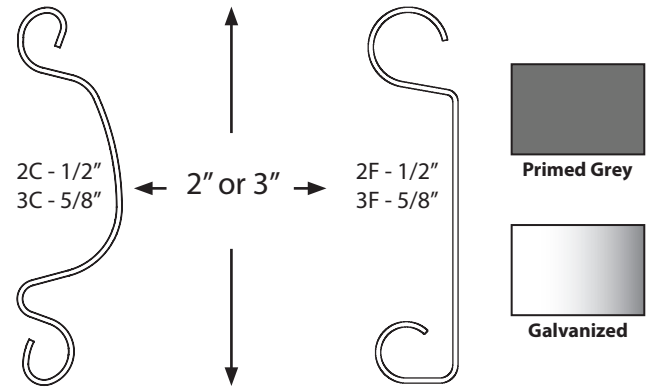

Operation-Models

- BP:** Push-up, Between jamb
- BC:** Chain hoist, Between jamb
- BM:** Motor, Between jamb
- FP:** Push-up, Face of wall
- FC:** Chain hoist, Face of wall
- FM:** Motor, Face of wall

Options



Slide Bolt Lock



UL Brush Weather-seal



Nema 7/9
Explosion proof motor



Nema 4 Water proof motor
Nema 4X Corrosion proof motor



Bottom Sensing Edge



Steel Double angle Bottom bar

FEATURES

Rugged 2" flat slats or curved slats in 22 ga. steel
Rugged 3" flat slats or curved slats in 22, 20, or 18 ga. steel
G90 galvanized curtain and hood does not require further painting

Structural angle guides and aluminum bottom bar are more durable and easier to repair than roll formed shapes

Steel plate brackets are more durable than stamped steel bracket plates

Heavy duty cast throats are more durable than stamped steel stops

Materials and Construction

Slats	2" flat or curved slats in 22 ga. steel 3" flat or curved slats in 22, 20, or 18 ga. steel
Bottom Bar	Extruded aluminum
Bracket Plates	1/4" thick steel in black finish
Barrel	Bolted design
Guides	Structural steel angle in black finish
Hood	24g steel - galvanized or grey finish
Windload	20 PSF
Springs	Oil tempered torsion springs for 50,000 cycles
Maximum Size of Openings	2C & 2F : 14'-0" wide x 14'-0" high 3C & 3F: 24'-0" wide x 20'-0" high * Consult for larger sizes

Warranty 1 year on materials and workmanship