

SDI Counter Fire Door



ROLLING STEEL COUNTER FIRE DOOR

- Manufactured in Canada
- Long-lasting fire shutter system featuring a 2" 2F flat slat curtain in 22 gauge steel
- Approved for all wall types (concrete, masonry, structural steel, rated gypsum board / Steel Stud and rated gypsum board / wood)
- Provides years of trouble free operation
- Available in push up, or crank operation

COUNTER FIRE DOOR




FEATURES

- Rugged 2" flat slats in 22 ga. steel
- Compact mechanical governor controls automatic closing speed of 6" to 2' per second
- Resetting is simple and can be performed by a single technician. Resets from one side of opening, reducing testing costs.
- Oil tempered springs for higher cycle life
- Fuse link release device
- Finish:** Rugged 2" flat slats in corrosion resistant grey prime finish
- Headroom Required:** 12"

Materials and Construction

Slats	2" flat slats , 22 ga. steel
Fire label	3/4, 1 1/2, 3 hour (4 hour available for masonry applications)
Maximum Opening Width	13'
Maximum opening Height	9'
Maximum sq footage of curtain	96' ft ²
Maximum size for drywall with wood jambs	8'-0" x 9'0"
Warranty	1 year on materials and workmanship

Slats

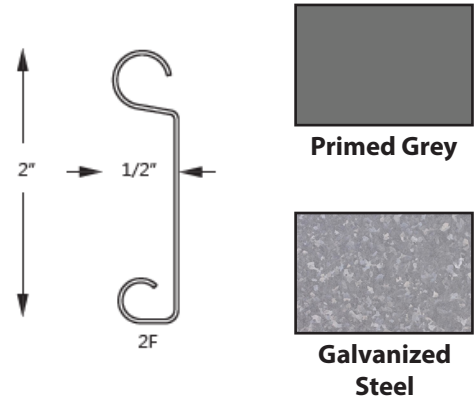

Operation-Models

- BPCF:** Push up, between jamb
- BKCF:** Crank, between jamb
- FKCF:** Crank, face of wall
- FPCF:** Push up, face of wall

Options



Fire Link release device



Bottom Steel Sill Angle

Hardware

Refer to hardware specification sheet for full information and options