

## SDI COMMERCIAL - MODEL C300




### COMMERCIAL SECTIONAL INSULATED STEEL DOOR

- Manufactured, engineered, stocked and assembled in Canada
- Long-lasting door system that is suitable for warehousing, fire halls, refrigerated buildings & more
- Manufactured on a continuous polyurethane production line utilizing the latest in rigid foam technology
- A wide range of door operators and controls available to suit your application
- High strength to weight ratio to ensure a strong and long-lasting door system



## SDI COMMERCIAL - MODEL C300

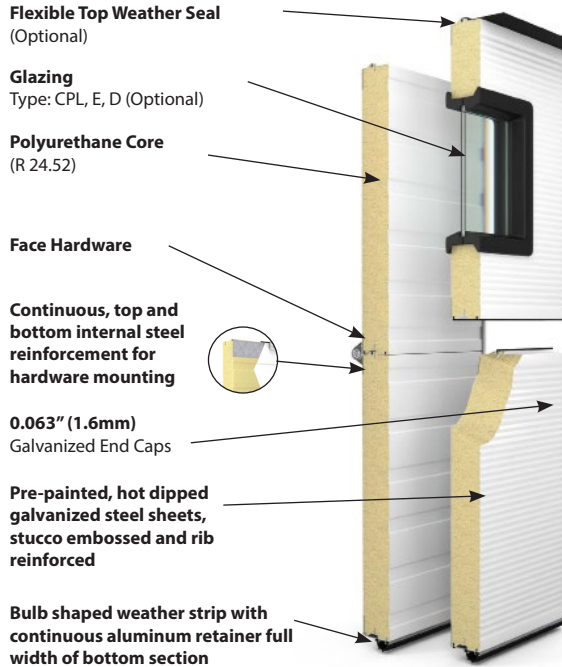

## FEATURES

Insulated sections fabricated from prepainted, hot dip galvanized, steel sheet; with rigid polyurethane insulation core, CFC-1 1 free, face sheet stucco embossed and rib reinforced

Sections thermally broken, steel-polyurethane-steel sandwich formed by continuous process

**Sections:** Formed with ship lap joint and 1.6mm (16ga) galvanized steel endcaps

**Reinforcement:** Continuous internal reinforcement for hardware mounting

**Finish:** Two coat, baked-on paint system, primer and polyester finish coat, white

**Hardware:** 3" Adjustable continuous angle (ADCA)

**Design:** Designed to meet industry standard windload requirements

**Weatherstripping:** Neoprene bulb weatherstrip with retainer. Two dual finned seals between sections (Optional track mount available)

### Materials and Construction

C300 Sections	3" (76mm) Thick
R-Value	R-24.52
Face Sheet Thickness	0.019" (0.41mm)
Maximum Opening Width	24'-2" (8941mm)
Maximum opening Height	22' (6706mm)
Warranty	10 years against delamination of the panels 1 year on materials and workmanship

## Colour and Profiles

### Panel Finishes - Ribbed profile



White


## Glazing



CPL

E

D

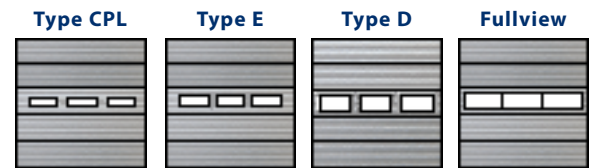

24" x 8"

24" x 12"

34" x 16"

## HEAVY-DUTY HARDWARE OPTIONS

### DOUBLE-END HINGE



### NYLON ROLLERS



### EXHAUST PORT



### HIGH CYCLE SPRINGS



Can be cut into any type of sectional door

